

STORY COUNTY
 RCB CULVERT NEW-TWIN BOX
 Proj. No. L-COL20--73-85
 Letting Date March 3, 2026

PROJECT TRAFFIC CONTROL PLAN
 THIS ROAD WILL BE CLOSED TO THROUGH TRAFFIC DURING CONSTRUCTION. LOCAL TRAFFIC TO ADJACENT PROPERTIES WILL BE MAINTAINED AS PROVIDED FOR IN ARTICLE 1107.08 OF THE CURRENT STANDARD SPECIFICATIONS. TRAFFIC CONTROL DEVICES, PROCEDURES, LAYOUTS, SIGNING, AND PAVEMENT MARKINGS INSTALLED WITHIN THE LIMITS OF THIS PROJECT SHALL CONFORM TO THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS" AS ADOPTED BY THE DEPARTMENT PER 761 OF THE IOWA ADMINISTRATIVE CODE (IAC) CHAPTER 130.
 ALL TRAFFIC CONTROL DEVICES SHALL BE FURNISHED, ERECTED, AND MAINTAINED BY THE CONTRACTOR.


UTILITIES INFORMATION
 UTILITY COMPANIES WHOSE FACILITIES ARE SHOWN ON THESE PLANS OR SHOWN TO BE WITHIN THE CONSTRUCTION LIMITS SHALL BE NOTIFIED BY THE CONTRACTOR OF THE CONSTRUCTION STARTING DATE AND SUBSEQUENT WORK IN THE AREA.
 ALLIANT ENERGY: 1-800-255-4268
 IOWA REGIONAL UTILITIES ASSOCIATION: 641-792-7011
 COLO TELEPHONE COMPANY: 641-377-2202
 CONSUMERS ENERGY: 641-485-0702
 HUXLEY COMMUNICATIONS COOP: 515-597-2281
 WINDSTREAM COMMUNICATIONS: 1-800-289-1901
 IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO NOTIFY THE OWNERS OF UTILITIES IN THE PROJECT AREA PRIOR TO THE BEGINNING OF ANY CONSTRUCTION. THE CONTRACTOR SHALL GRANT ACCESS TO THESE FACILITIES FOR NECESSARY MODIFICATIONS. UNDERGROUND FACILITIES, STRUCTURES AND UTILITIES HAVE BEEN PLOTTED FROM AVAILABLE SURVEYS AND RECORDS, AND THEIR LOCATIONS ARE ONLY APPROXIMATE. IT IS POSSIBLE THERE MAY BE OTHER UTILITIES, THE EXISTENCE OF WHICH IS PRESENTLY NOT KNOWN OR SHOWN. IT IS THE CONTRACTOR'S RESPONSIBILITY TO DETERMINE ALL UTILITIES IN THE PROJECT AREA AND THEIR EXACT LOCATION AND TO AVOID DAMAGE TO THEM. NO CLAIMS FOR ADDITIONAL COMPENSATION WILL BE ALLOWED TO THE CONTRACTOR FOR ANY INTERFERENCE OR DELAY CAUSED BY SUCH WORK.

IOWA
DEPARTMENT OF TRANSPORTATION
 Highway Division
 PLANS OF PROPOSED IMPROVEMENT ON THE
SECONDARY ROAD SYSTEM
STORY COUNTY
RCB CULVERT NEW
-TWIN BOX

ON 310TH ST. OVER DRAINAGE, S20 T82 R21

Refer to Proposal Form for a list of applicable specifications.

Scales: As Noted

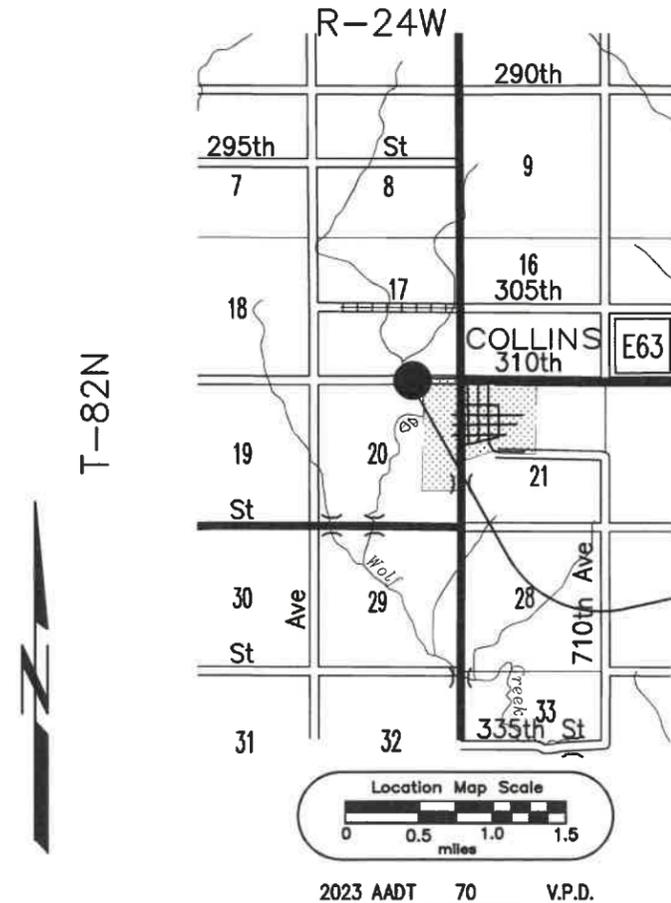

CORPS OF ENGINEERS PERMIT
 CONSTRUCT THIS PROJECT ACCORDING TO THE REQUIREMENTS OF U.S. ARMY CORPS OF ENGINEERS Nationwide Permit No. 14. A COPY OF THIS PERMIT IS AVAILABLE FROM THE IOWA DOT WEBSITE THE U.S. ARMY CORPS OF ENGINEERS RESERVES THE RIGHT TO VISIT THE SITE WITHOUT PRIOR NOTICE. ([HTTP://WWW.ENRPERMITS.IOWADOT.GOV/](http://www.enrpermits.iowadot.gov/)).



PROJECT LOCATION
 STA 9+83.70; ON 310TH ST.
 OVER DRAINAGE, S20 T82 R21

DESIGN FOR:
 TWIN 12'X7'X44' PRE-CAST
 CONCRETE BOX CULVERT
 ON 0° SKEW

Project No. L-COL20--73-85
 FHWA# 313530

INDEX OF SHEETS	
No.	Description
A.01	TITLE SHEET
C.01	QUANTITY INFORMATION SHEET
C.02	GENERAL NOTES
C.03	TABULATIONS SHEET
C.04	CULVERT DETAIL SHEET
D.01	PLAN AND PROFILE SHEET
W.01 and W.03	CROSS SECTIONS

MILEAGE SUMMARY			
		105-1	
		08-27-94	
Div.	Location	Lin. Ft.	Miles
I	STA. 9+00.00 TO STA. 10+75.00	175.00	0.033
Total		175.00	0.033

STANDARD ROAD PLANS		
		105-4
		10-16-07
The following Standard Road Plans shall be considered applicable to construction work on this project.		
Number	Date	Title
DR-101	04-18-17	PIPE CULVERT (BEDDING AND BACKFILL)
DR-102	04-21-15	PIPE CULVERT (COVER AND CAMBER)
DR-103	04-21-15	PIPE CULVERT (INSTALLATION DETAILS)
DR-104	04-19-16	DEPTH OF COVER TABLES FOR CONCRETE AND CORRUGATED PIPE
EC-301	10-18-22	ROCK EROSION CONTROL (REC)
EW-101	10-17-17	EMBANKMENT AND REBUILDING EMBANKMENTS
EW-102	10-20-15	ALLOWABLE PLACEMENT OF UNSUITABLE SOIL IN EMBANKMENTS
TC-252	04-19-20	ROUTES CLOSED TO TRAFFIC

SEND SHOP DRAWINGS TO:
 STORY COUNTY ENGINEER
 837 N AVE.
 NEVADA, IOWA 50201

Accepted by

 Story County Engineer Date 1-20-26

I hereby certify that this engineering document was prepared by me or under my direct personal supervision and that I am a duly licensed Professional Engineer under the laws of the State of Iowa.
 Signed: Date: 1-16-26
 Tyler Sparks, P.E. 21419
 My license renewal date is December 31, 2026
 Pages or sheets covered by this seal:
 (Entire submission unless specified here)



PROJ No. L-COL20--73-85

QUANTITY INFORMATION SHEET

ESTIMATED PROJECT QUANTITIES OF QUANTITIES
(1 DIVISION PROJECT)

100-1A
07-15-97

ITEM	ITEM CODE	ITEM	UNIT	TOTAL
1	2101-0850001	CLEARING AND GRUBBING	ACRE	0.3
2	2102-2625001	EMBANKMENT-IN-PLACE, CONTRACTOR FURNISHED	CY	109.4
3	2102-2710070	EXCAVATION, CL 10, ROADWAY AND BORROW	CY	214.8
4	2104-2710020	EXCAVATION, CL 10, CHANNEL	CY	25.0
5	2110-3825010	GRANULAR MATERIAL	TON	56.0
6	2401-6745625	REMOVAL OF EXISTING BRIDGE	LS	1.0
7	2402-2720000	EXCAVATION, CLASS 20	CY	325.4
8	2415-2111207	PRECAST CONCRETE BOX CULVERT, 12 FT. X 7 FT.	LF	88.0
9	2415-2201207	PRECAST CONCRETE BOX CULVERT STRAIGHT END SECTION, 12 FT. X 7 FT.	EACH	2.0
10	2415-2300000	PRECAST CONCRETE BOX FLARED APRON	EACH	1.0
11	2507-3250005	ENGINEERING FABRIC	SY	47.0
12	2507-6800061	REVTMENT, CLASS E	TON	17.0
13	2507-6875002	REVTMENT, REMOVE AND REPLACE	CY	18.0
14	2518-6910000	SAFETY CLOSURE	EACH	4.0
15	2528-8445110	TRAFFIC CONTROL	LS	1.0
16	2533-4980005	MOBILIZATION	LS	1.0

STORY COUNTY:

Story County to stake culvert control and right-of-way; perform seeding and mulching; and furnish and place granular surfacing.

ESTIMATE REFERENCE INFORMATION (cont.)

ITEM NO.	DESCRIPTION
1.	Entire project to be cleared and grubbed from BOP to EOP and from ROW line to ROW line.
2.	Contractor to furnish suitable borrow material. Much of this material is intended for placement in the top 27'x25'x3½' of roadway fill over the culvert; the rest of this item quantity will be used to achieve dirt balance.
3.	Plan quantity is based on approximately 207.3 CY of fill (30% shrink factor) and 214.8 CY of cut. No payment for overhaul will be made. Type A compaction required. Approximately 83.0 cy of this item includes the stripping, stockpiling, and spreading topsoil. Topsoil to be spread smooth to a minimum of 4" on all disturbed areas from catch points to edge of road. Slopes to be finished smooth to allow for seeding. See Cross Section sheets for station-by-station dirt quantities.
4.	Item for excavation for shaping inlet and outlet to match culvert opening. Suitable excavated material may be drained and wasted on roadway foreslopes with the approval of the Engineer.
5.	Approximately 56.0 tons of 1" rock is required under the box for bedding.
6.	Materials from the old structure shall become the property of the Contractor according to article 1104.08 of the Standard Specifications, and removed from site. The existing structure is a 23'x24' wood beam bridge with timber deck, piling, and wingwalls, on a 0' skew.
7.	Item for excavation for culvert placement. Suitable material may be used to backfill culvert and supplement Class 10 roadway quantity with approval from the Engineer.
8.-10.	Precast RCB culvert shall be two single 12'x7' cells, side-by-side, with straight end sections on the outlet and flared wingwalls on the inlet. The culvert shall be supplied by the Contractor as per plan, which includes dropwalls, and parapets. See Tabulation 104-4 on Sheet C.03 and notes on Sheet C.02 for details. This item includes (approximately 9.5 cy) concrete and all other materials, equipment, and labor necessary for the concrete fill between the two culvert barrels.
11.-12.	Items for constructing slope protection at inlet and outlet. See Typical 4404-2 on Sheet C.04, plan view on Sheet D.01, Tabulation 100-23 on Sheet C.03, and Standard Road Plan EC-301 for details. Item include furnishing revetment and all labor necessary for the construction of the splash basin.
13.	Item for the removal, stockpiling, and reuse of existing revetment and broken concrete. Preliminary survey shows several pieces of broken concrete lying in the streambed and on the stream banks. Revetment and broken concrete shall be reused to armor the streambanks at culvert outlet. Material with steel or over 3' maximum dimension shall have steel removed and be processed under the maximum dimension or removed from site. Quantity is an estimate only. Contractor shall be paid actual quantity by measuring the stockpile and computing its volume. Basis of Payment shall be in cubic yards as computed by measurements.
14.	See Tabulation 108-13A on this sheet C.03 for stationing and quantities.
15.	See Standard Road Plan TC-252 for details.

PROJ No. L-COL20--73-85

GENERAL NOTES SHEET

GENERAL NOTES

GENERAL NOTES:

Contractor to construct a twin 12'x7'x44' pre-cast concrete box culvert on a 0° skew, on 310th St. over drainage and grade approaches.

It shall be the contractor's responsibility to provide waste areas or disposal sites for excess material (excavated material or broken concrete) which is not desirable to be incorporated into the work involved on this project. These areas shall not impact wetlands or "Waters Of The U.S." No payment for overhaul will be allowed for material hauled to these sites. No material shall be placed within the right-of-way, unless specifically stated in the plans.

Contractor shall maintain access to individual properties during construction, and any associated work shall be considered incidental to this project.

Construction activities, equipment, and materials shall be kept out of the streams, wetlands, or other bodies of water to the maximum extent practicable.

CONTRACTOR'S WORK AREA:

The Contractor's work and material storage area shall be defined by the Contractor and noted to the Engineer. Any area outside the Contractor's work and material storage area that is disturbed by the Contractor shall be repaired to its original condition by the Contractor and no additional payment shall be made for this work.

UTILITY NOTES:

The Contractor shall call One Call at least 48 hours prior to beginning work. Utility companies found to be located within the construction area are listed on the title sheet of these plans. See Section 1107.15 of the Iowa DOT Standard Specifications For Highway And Bridge Construction, Series 2015, regarding utility related responsibilities.

SHOP DRAWING NOTES:


Working drawings and calculations shall be furnished by the Contractor and certified by a licensed engineer in the State of Iowa, and shall be submitted to the Story County Engineer for review and approval. Refer to Section 1105.03 for additional information.

EMERALD ASH BORER NOTE:

Dispose of all wood material generated as a result of clearing and/or grubbing according to the Iowa Department of Agriculture and Land Stewardship's Emerald Ash Borer (EAB) Quarantine Order. For more information refer to http://www.iowatreepests.com/eab_regulations.html.

INDIANA BAT HABITAT:

See Iowa DOT Specification Section 2101.01

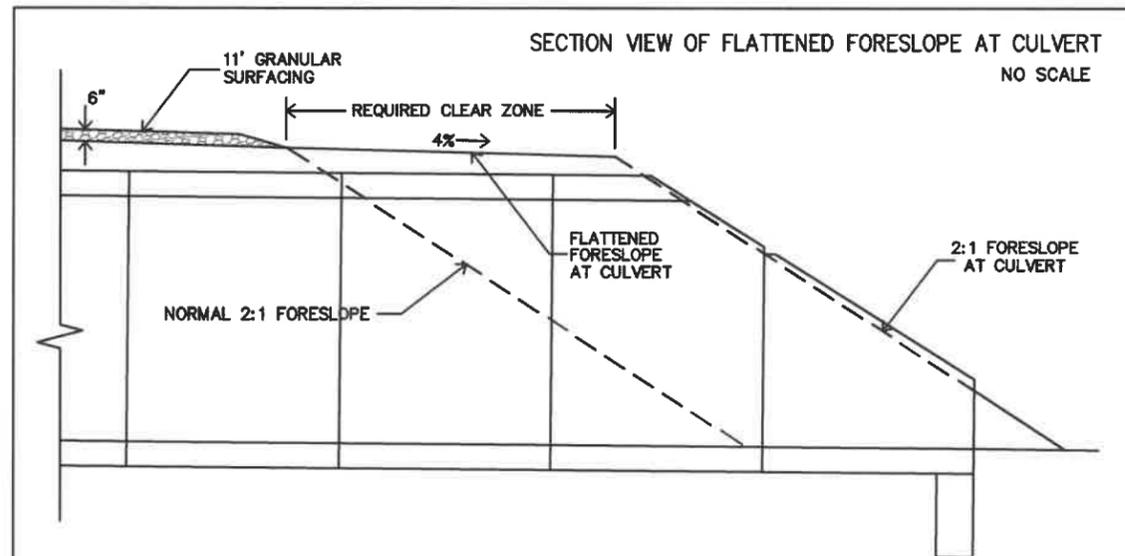

PRE-CAST CULVERT NOTES

INSTALLATION NOTES:

The "twin" culvert shall actually be two single 12'x7' pre-cast culverts placed side by side, 6" apart. The space between the culverts shall be filled with concrete to the top of the culverts, and the vertical faces at the end sections shall be formed for pouring. See detail on this sheet below. All costs including material and labor associated with filling the space between the culverts with concrete shall be incidental to the bid item Precast Concrete Box Culvert. The estimated concrete quantity is approximately 9.5 cy (with 6" space between culverts).

Precast concrete box culvert sections shall be laid with the groove end of each section up-grade, and the sections shall be tightly joined. Joint openings between sections should be as tight as practicable and limited to a maximum of 3/4 inch openings. The joint on the bottom of the culvert shall be sealed with a flexible water tight 1 inch butyl rope gasket as per Materials I.M. 491.09. Butyl rope gasket shall be installed in accordance with the recommendations of the manufacturer and shall extend vertically 6 inches above the bottom fillet. All joints shall be trimmed clean on the inside after sealing. The contractor shall also place a 2 foot wide piece of engineering fabric around the top and sides of each precast joint. The fabric shall be centered with 1 foot on each side of the joint. The fabric shall be attached to the walls and top of each section to prevent the fabric from slipping off the joint during backfilling operations. Attachment methods shall be approved by the engineer.

All costs including material, equipment, and labor necessary for installing the culvert as detailed herein, shall be included in the bid item Precast Concrete Box Culvert. The engineering fabric shall meet the material requirements as set forth in 4196.01c of the Iowa DOT Standard Specifications. During backfilling the compaction adjacent to the bottom corner radii shall be accomplished with a mechanical hand compactor. The contractor shall furnish and install lifting hole plugs for each section. Lifting holes shall be plugged with a precast concrete plug, sealed and covered with mastic or mortar.

DESIGN REQUIREMENTS:

The precast culvert sections shall meet the minimum requirements of ASTM C 1577, Table 1 sections that are designed for combined earth dead load and AASHTO HL-93 live load conditions. Any precast box culvert designs submitted that vary from the ASTM C 1577 standard, shall be designed and sealed by a professional engineer, currently registered in the State of Iowa. Minimum length of precast sections shall be 4.0 feet. Minimum culvert wall thickness shall be 8 inches.

PRE-CONSTRUCTION NOTES:


The Contractor shall submit details of the proposed precast box sections to the Story County engineers office for approval. These details shall include a situation plan, culvert barrel cross sections showing steel, and end section details. The length in linear feet of precast concrete box culvert will be based on the plan quantity.

For the number of linear feet given on the plan, the Contractor will be paid the contract unit price per linear foot. The payment shall be full compensation for furnishing all materials, labor and equipment necessary to complete the work except for items in end sections and Class 20 Excavation.

For each precast box culvert end section installed the Contractor will be paid the contract price for each. The payment shall be full compensation for furnishing all materials (including dropwalls), labor and equipment necessary to complete the work except for items in precast concrete box culvert and Class 20 Excavation.

Dropwalls and parapets shall be precast.

The Contractor shall furnish culvert ties for all joints. The main section joints will have one tie on each side of the barrel and the last barrel section will be attached to the end sections with two ties per side. Culvert ties shall be included in the cost for precast concrete box culvert. Tie rods will be 1 inch in diameter steel and shall meet requirements of ASTM A 709 grade 36 or equal. Culvert tie assemblies shall be galvanized or painted according to 2408.30 of the Iowa DOT Standard Specifications. Acrylic topcoat not required.

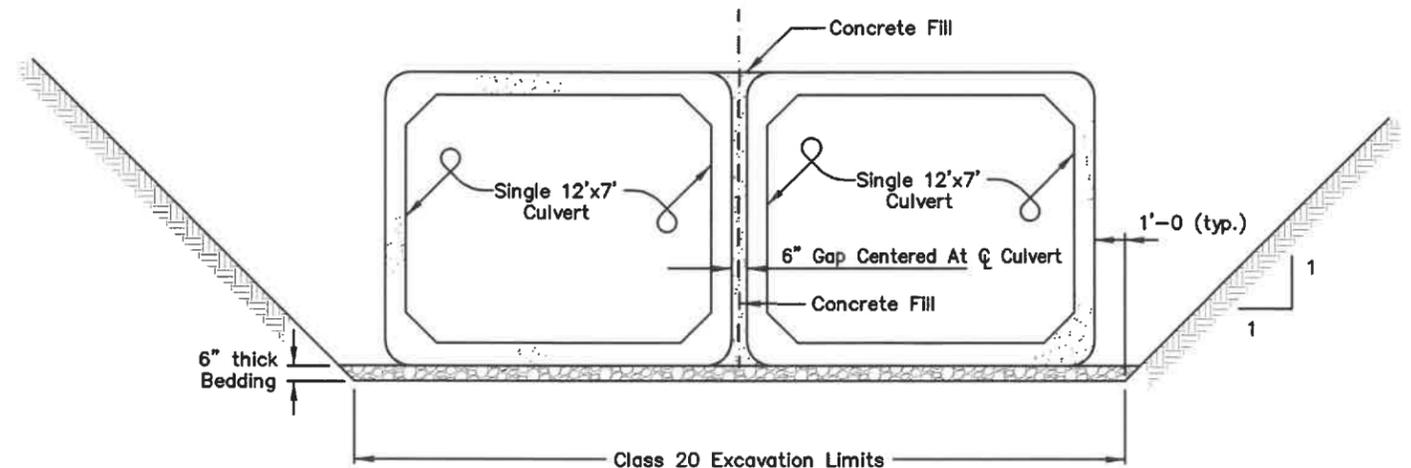

PROJ No. L-COL20--73-85


TABULATIONS SHEET

Normal section shown may be modified appropriately in areas of superelevated curves or other locations specifically designated by the Engineer.

See Plan & Profile sheets and cross sections for additional details of ditches and backslopes.

MODIFIED

LOCATION			DIMENSIONS					
ROAD IDENTIFICATION	SIDE	STATION TO STATION	FF* Feet	D Feet	W Feet	R Feet	S Feet	
310th Ave.	Lt.	9+00.0	9+37.1	0	var.	4	13	11
310th Ave.	Lt.	9+37.1	9+66.9	var.	var.	4	13	11
310th Ave.	Lt.	9+66.9	10+00.3	5	var.	4	13	11
310th Ave.	Lt.	10+00.3	10+30.4	var.	var.	4	13	11
310th Ave.	Lt.	10+30.4	10+75.0	0	var.	4	13	11
310th Ave.	Lt.	9+00.0	9+37.1	0	var.	4	13	11
310th Ave.	Lt.	9+37.1	9+66.9	var.	var.	4	13	11
310th Ave.	Lt.	9+66.9	10+00.3	5	var.	4	13	11
310th Ave.	Lt.	10+00.3	10+30.4	var.	var.	4	13	11
310th Ave.	Lt.	10+30.4	10+75.0	0	var.	4	13	11

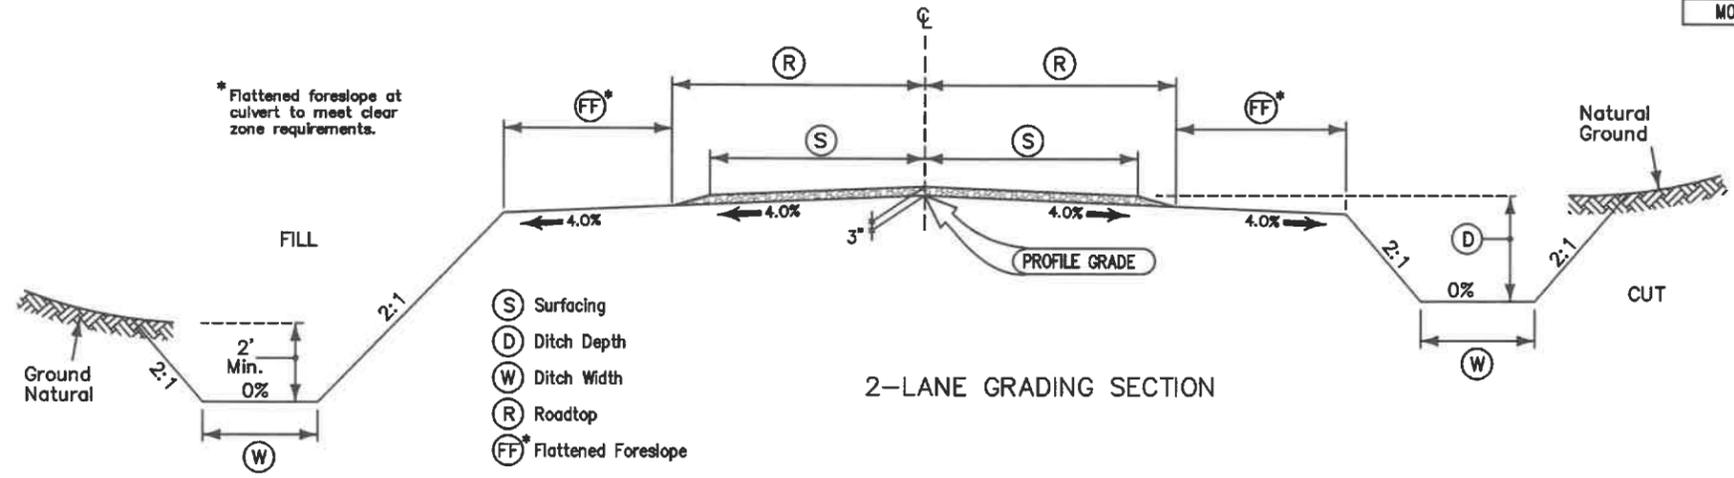

DRAINAGE STRUCTURES BY CULVERT CONTRACTOR

104-4
10-20-09

Location	Size Ft.	Type	Length New Const. Lin. Ft.	No. of Aprons	Flow Line Elevation				Dimensions -- Lin. Ft.				Skew Ahead		By Road Contractor				Floodable* Backfill (A) Cu. Yds.	Porous* Backfill (B) Cu. Yds.	Flooded Backfill (A+B) Cu. Yds.	REMARKS	
					Left	Right	Other	Other	Left	Right	Left	Right	Left	Right	Degrees	Lt.	Dike						Comp. Backfill Cu. Yds.
																	Rt.	Location Station					
9+83.70	12x7	Twin RCB	44.0	2	973.75	973.50			22.7	21.3												325.4 cy Class 20 Excav.	

ROCK EROSION CONTROL

100-23
04-21-15

Location				L FT	W FT	Rock Erosion Control (REC)					Material Bid Quantities			Remarks
Road Identification	Begin Station	End Station	Side Lt./Rt.			Type 1 Rock Ditch Check	Type 2 Rock Ditch	Type 3 Rock Flume	Type 4 Rock Splash Basin	Type 5 Rock Slope Protection	Erosion Stone TON	Class E Revetment TON	Eng. Fabric SY	
310th Ave.	9+67.0	10+00.0	26.5' Rt.	11.8	3.0					X	8.87	24.46	Slope protection at RCB outlet.	
310th Ave.	9+58.0	10+09.0	28.0' Lt.	10.5	3.0					X	7.95	22.56	Slope protection at RCB inlet.	

TABULATION OF SAFETY CLOSURES




108-13A
08-01-08

Refer to Section 2518 of the Standard Specifications

STATION	CLOSURE TYPE		REMARKS
	ROAD QTY.	HAZARD QTY.	
9+00.0	1		
9+25.0		1	
9+50.0		1	
10+75.0	1		
	2	2	TOTAL = 4.00



PROJ No. L-COL20--73-85


CULVERT DETAIL SHEET

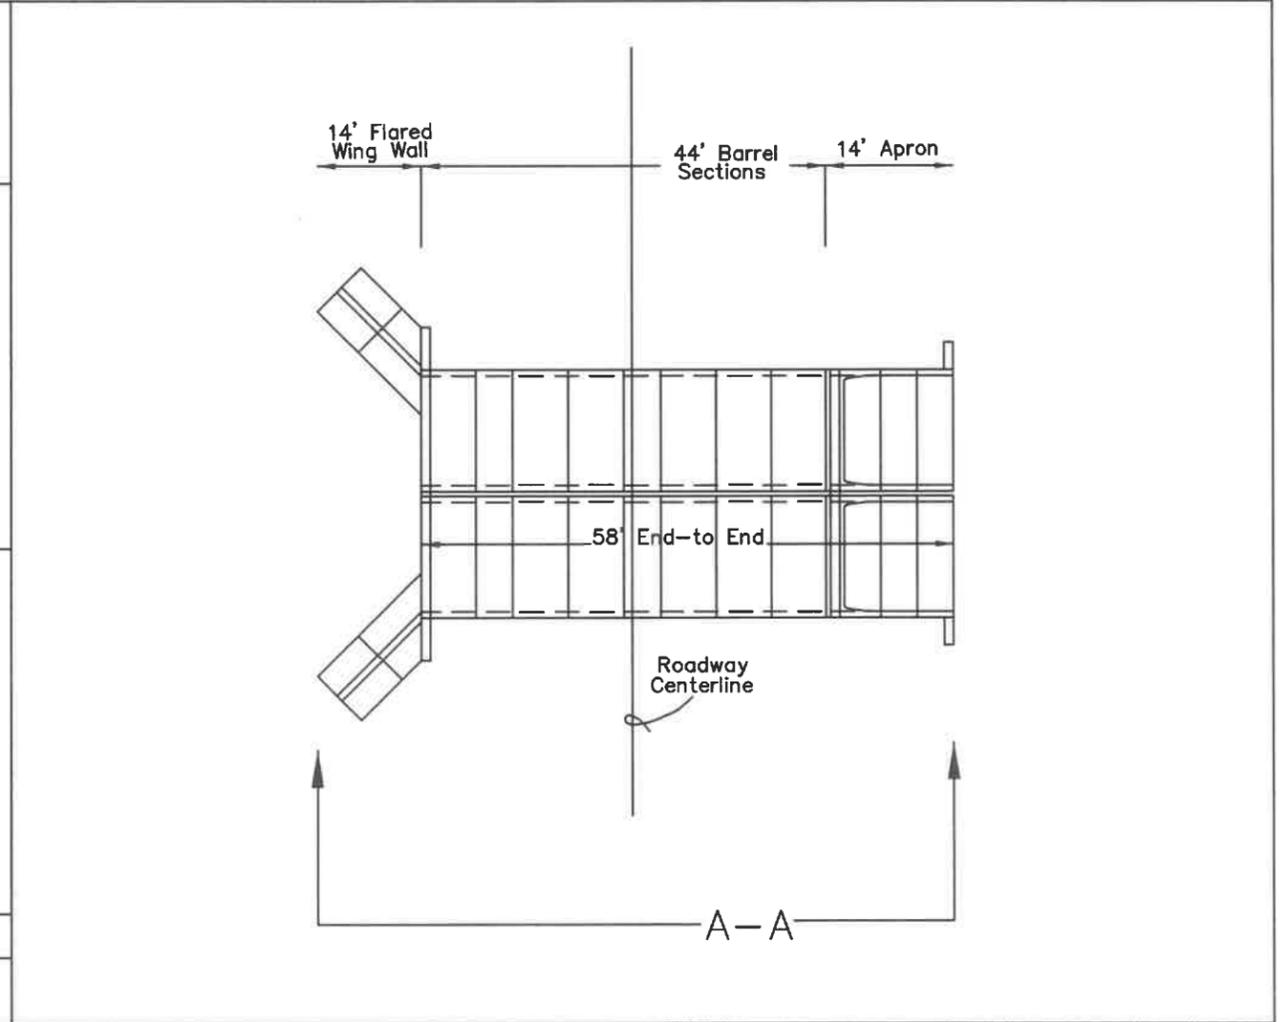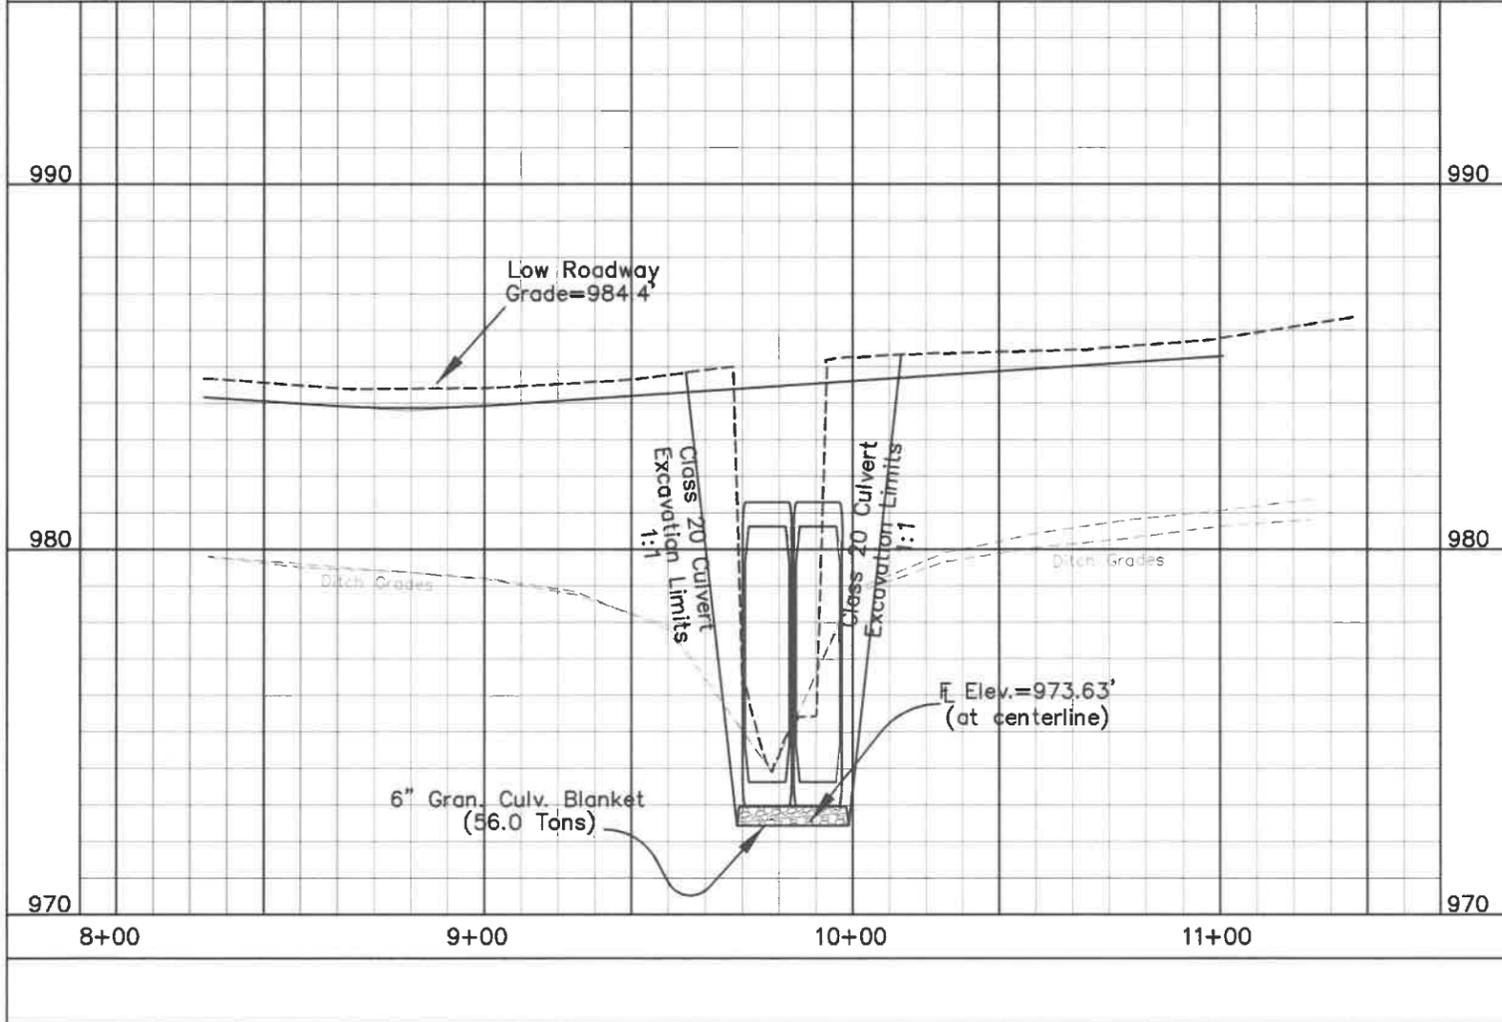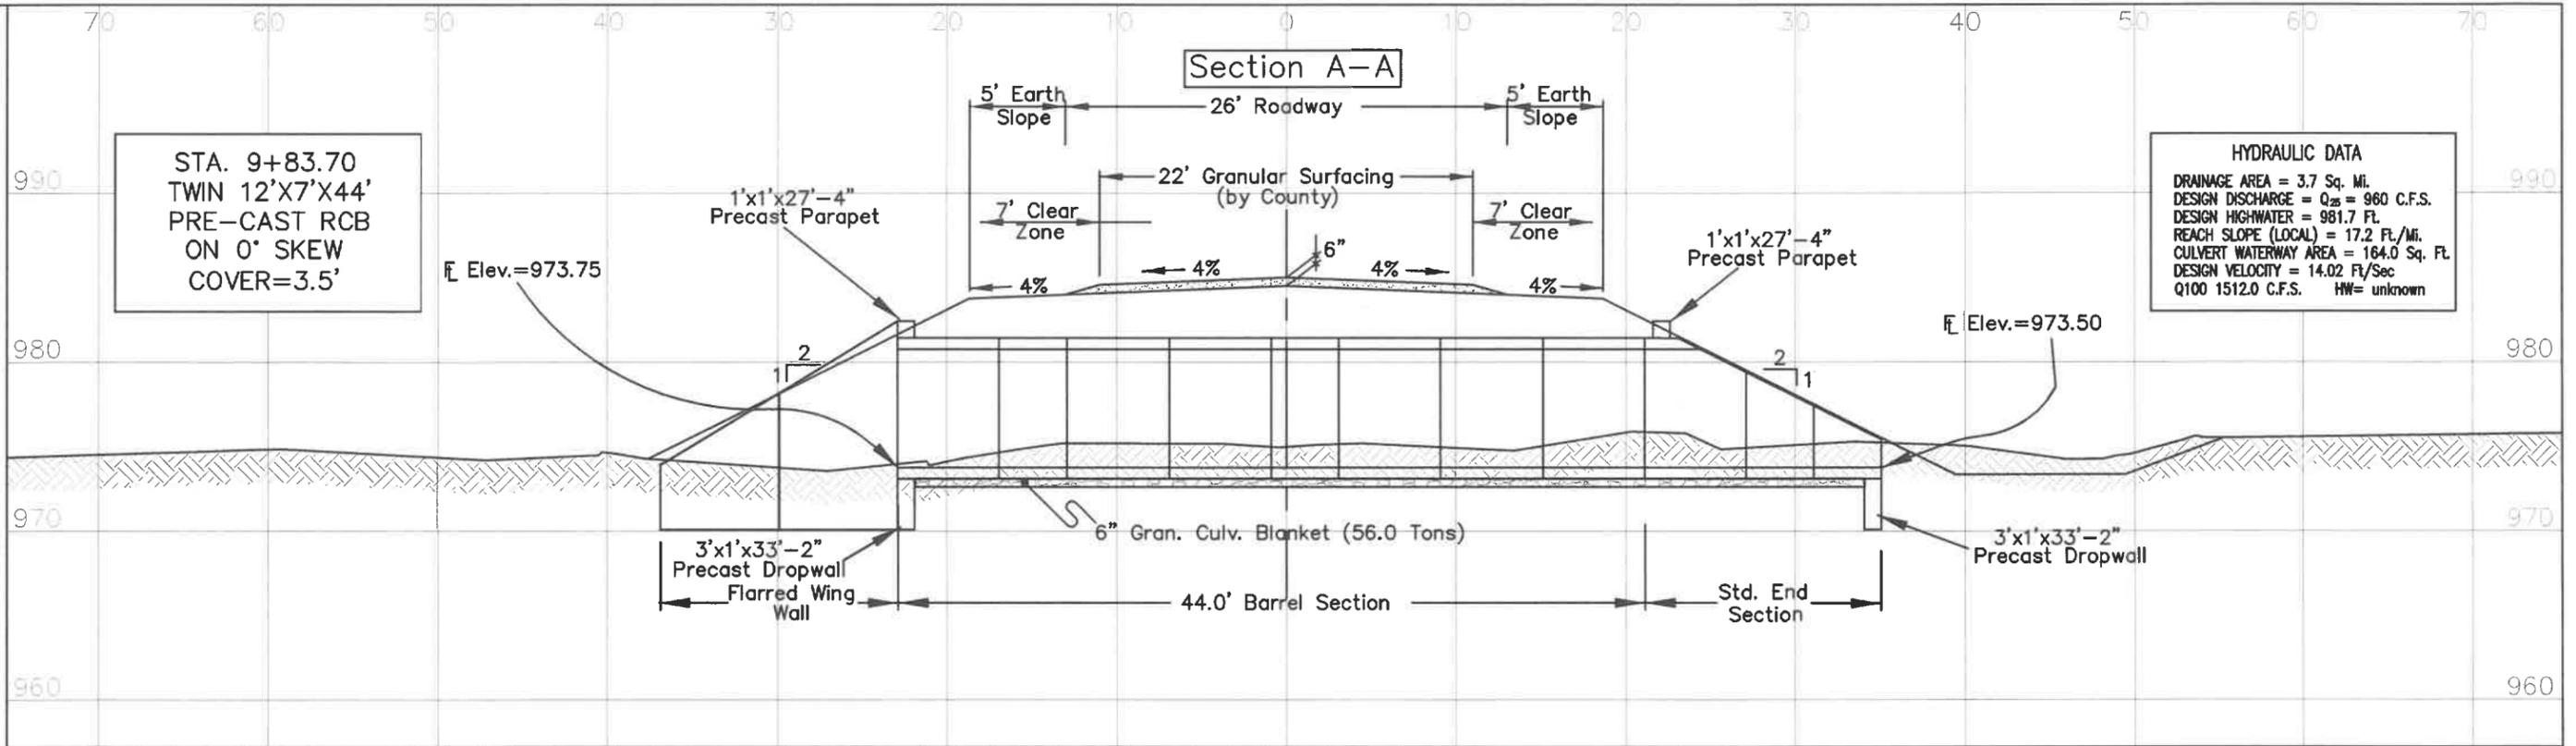


PROJ No. L-COL20--73-85

PLAN AND PROFILE SHEET

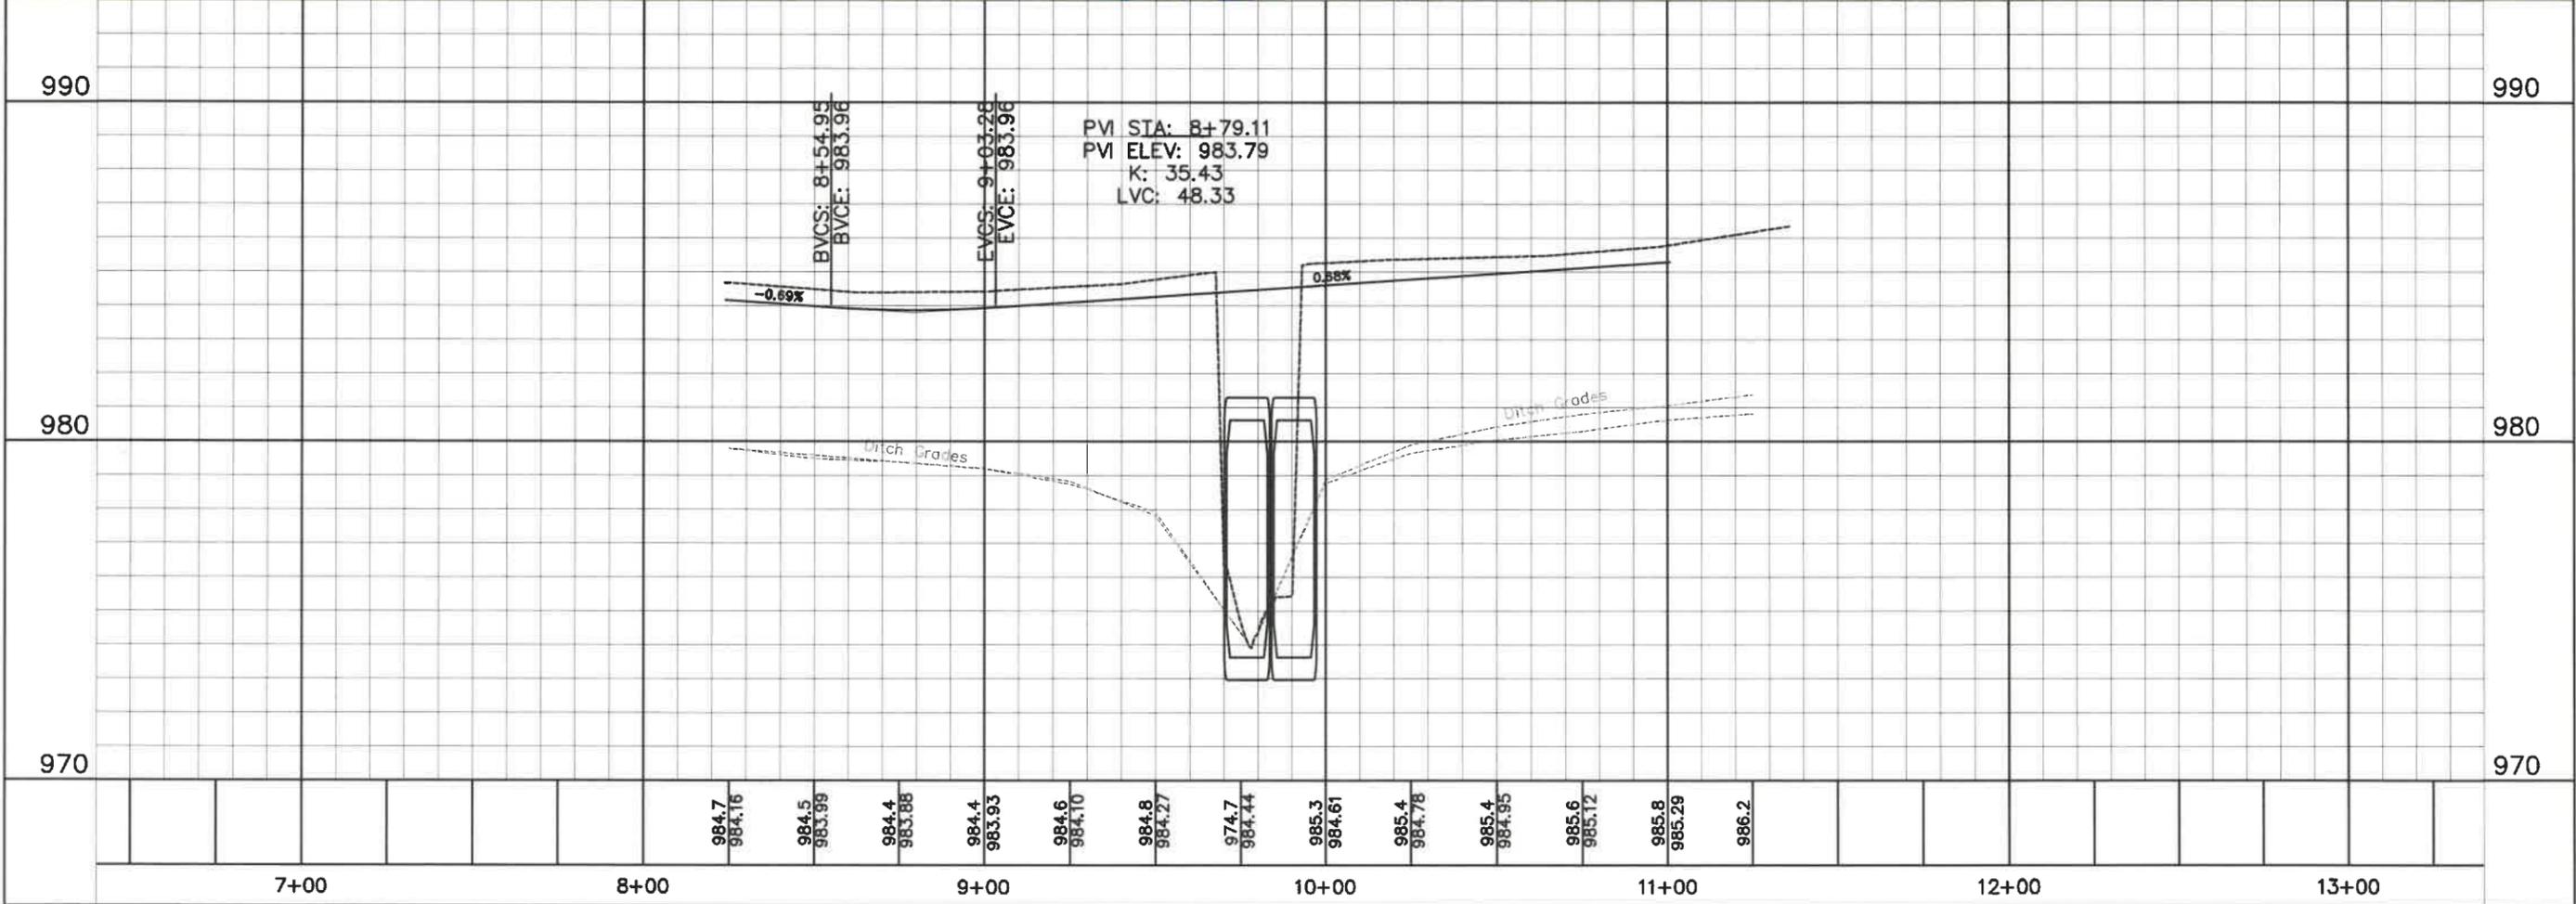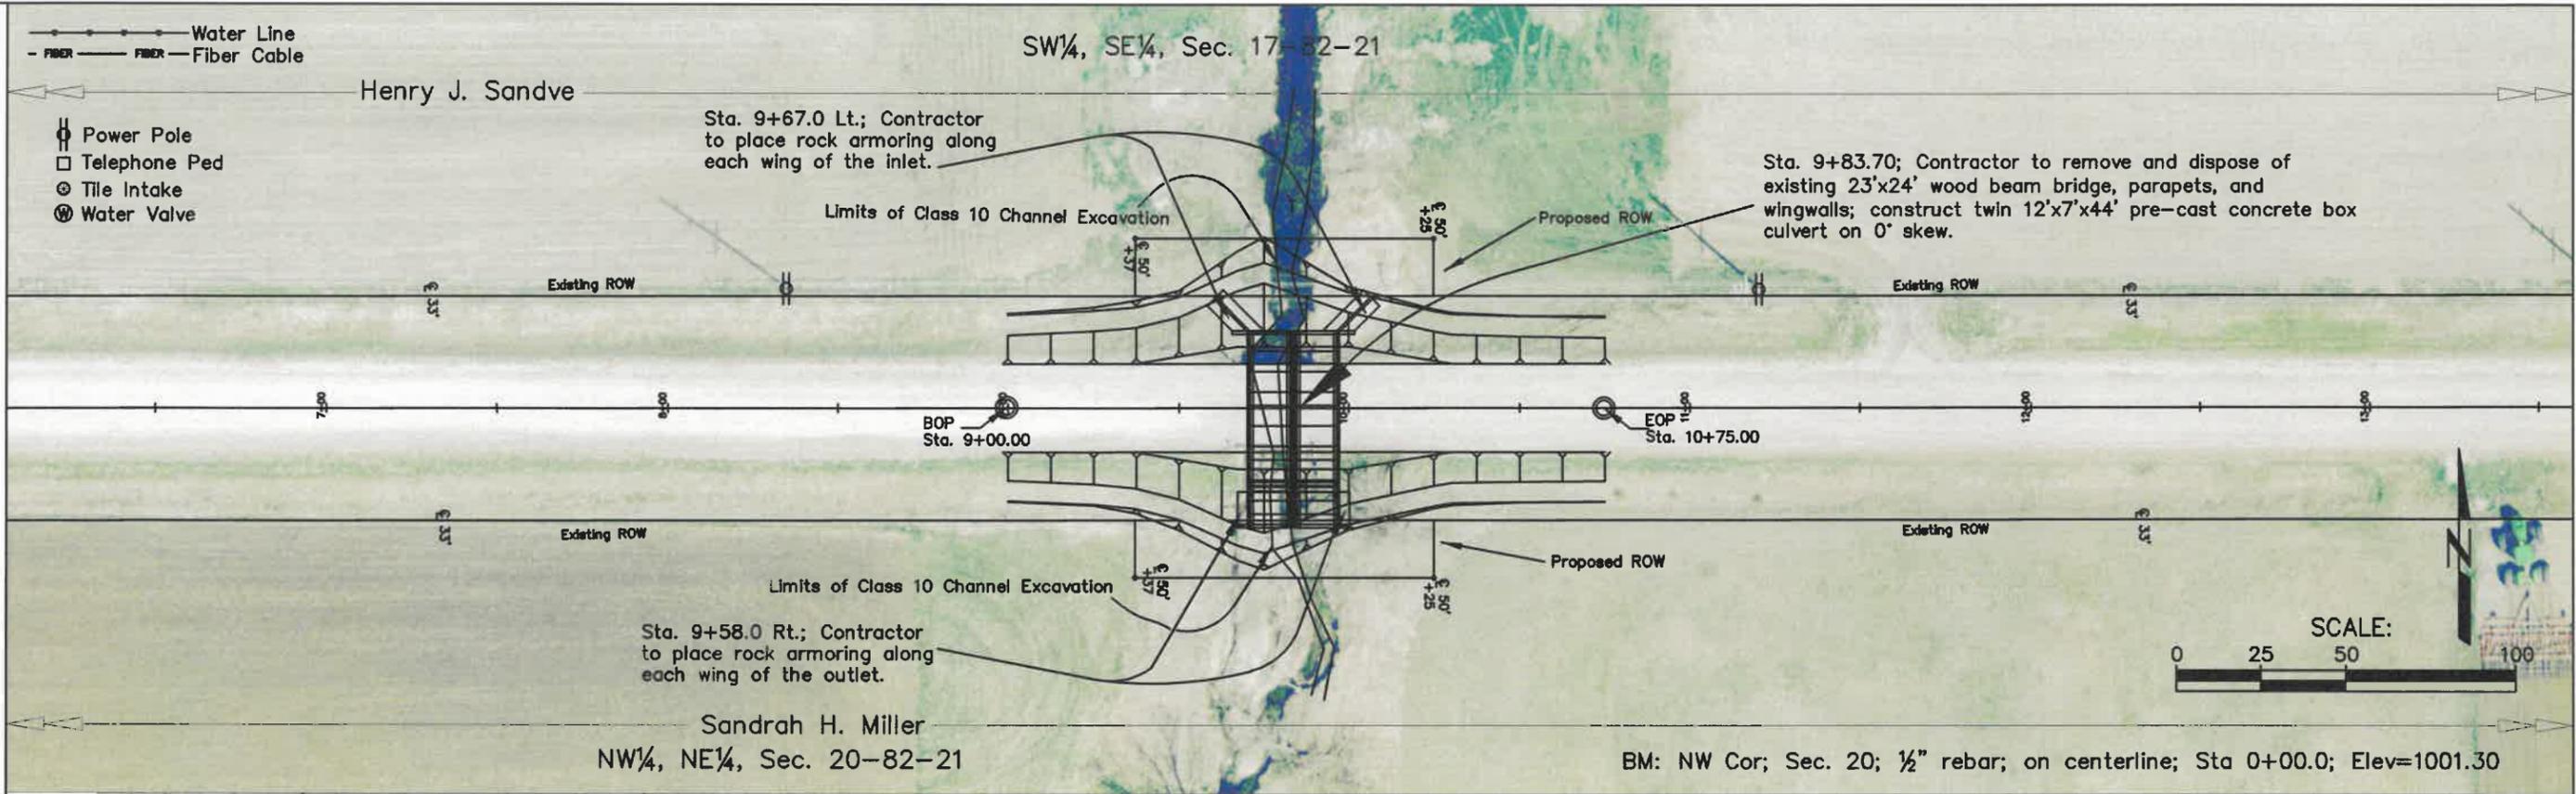


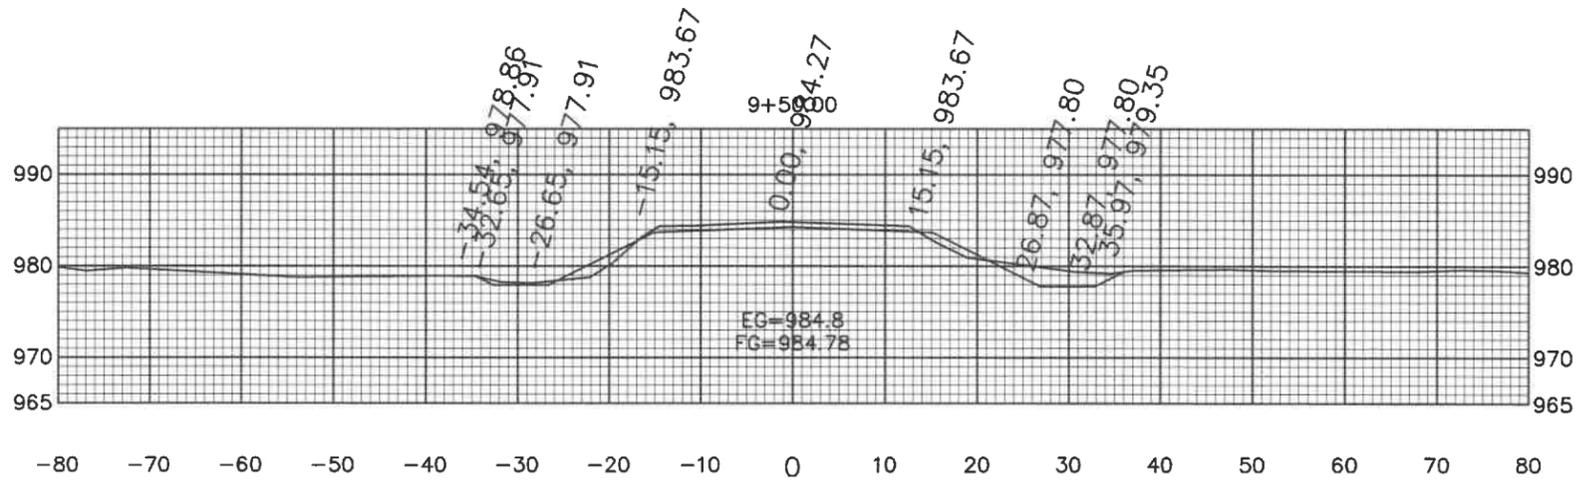


Sta. 9+50.00	
Cut Area	37.35
Fill Area	11.89
Cut Vol	33.03
Fill Vol	7.15

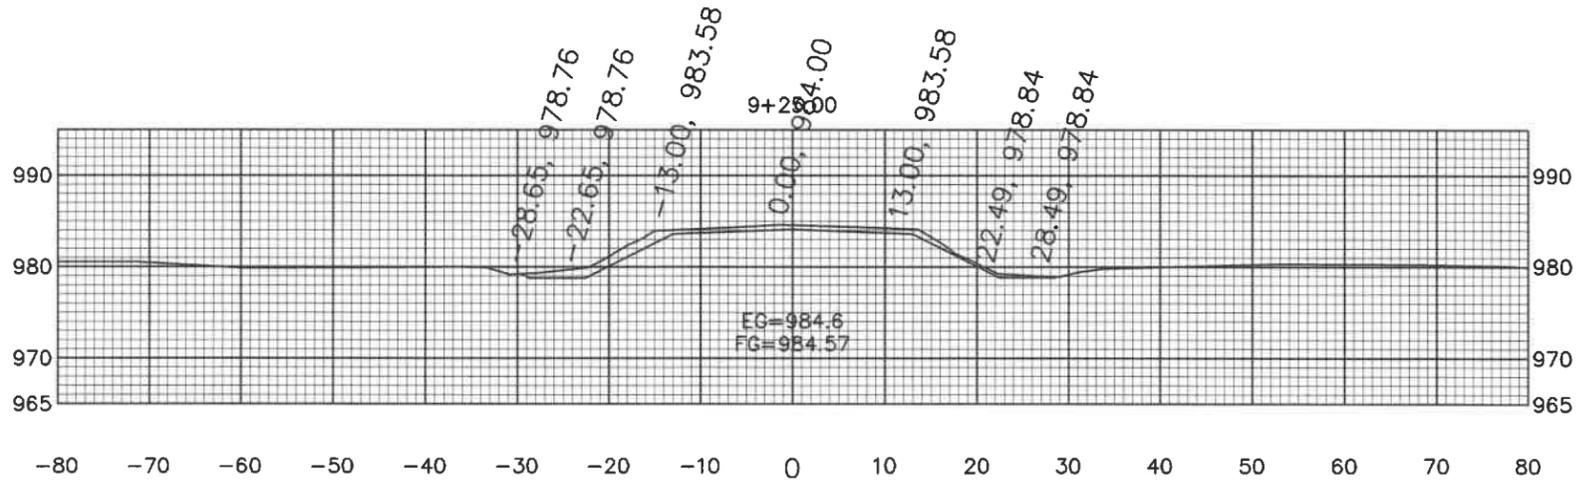


Sta. 9+25.00	
Cut Area	33.99
Fill Area	0.00
Cut Vol	29.66
Fill Vol	0.00

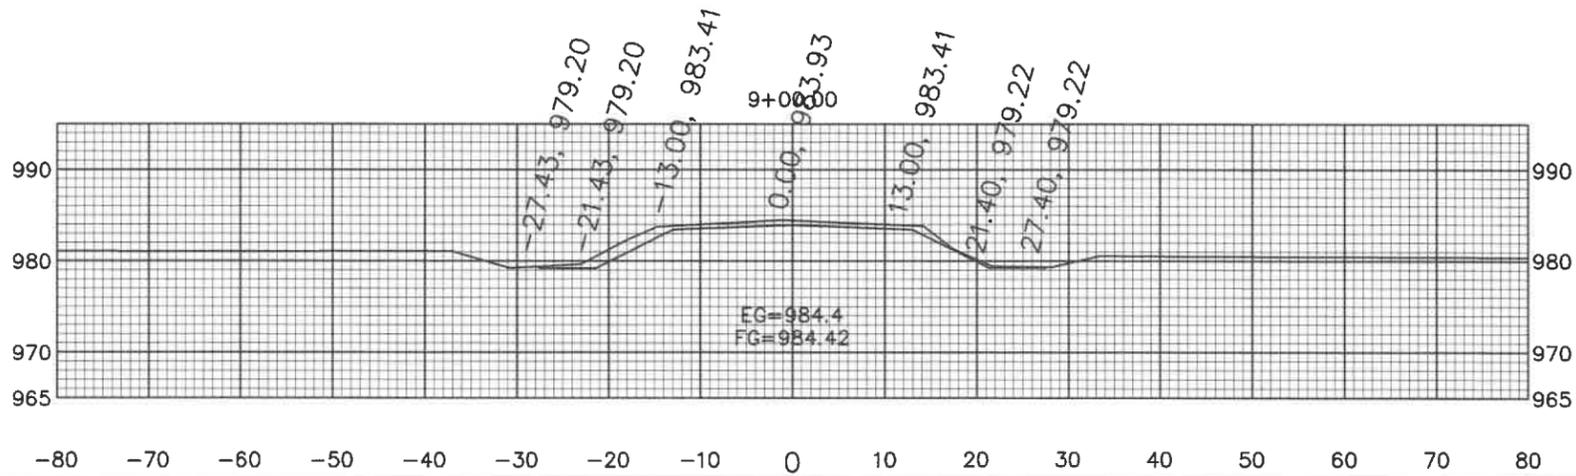


Sta. 9+00.00	
Cut Area	30.08
Fill Area	0.00
Cut Vol	13.92
Fill Vol	0.00

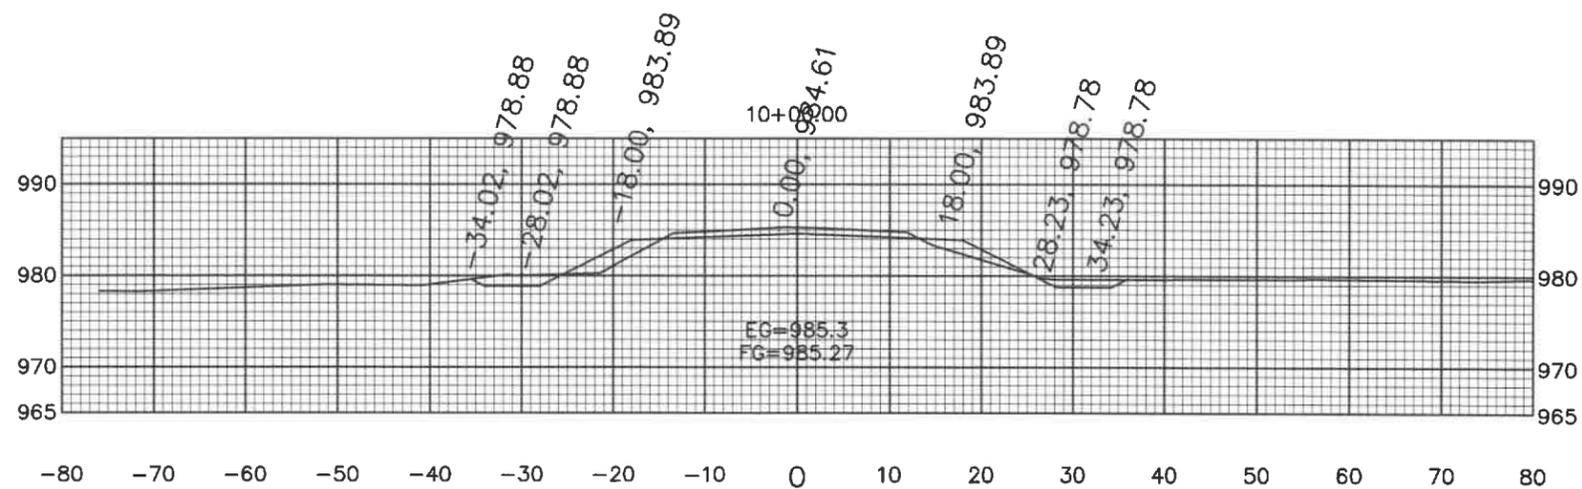


Sta. 10+00.00	
Cut Area	32.99
Fill Area	22.94
Cut Vol	4.11
Fill Vol	3.25

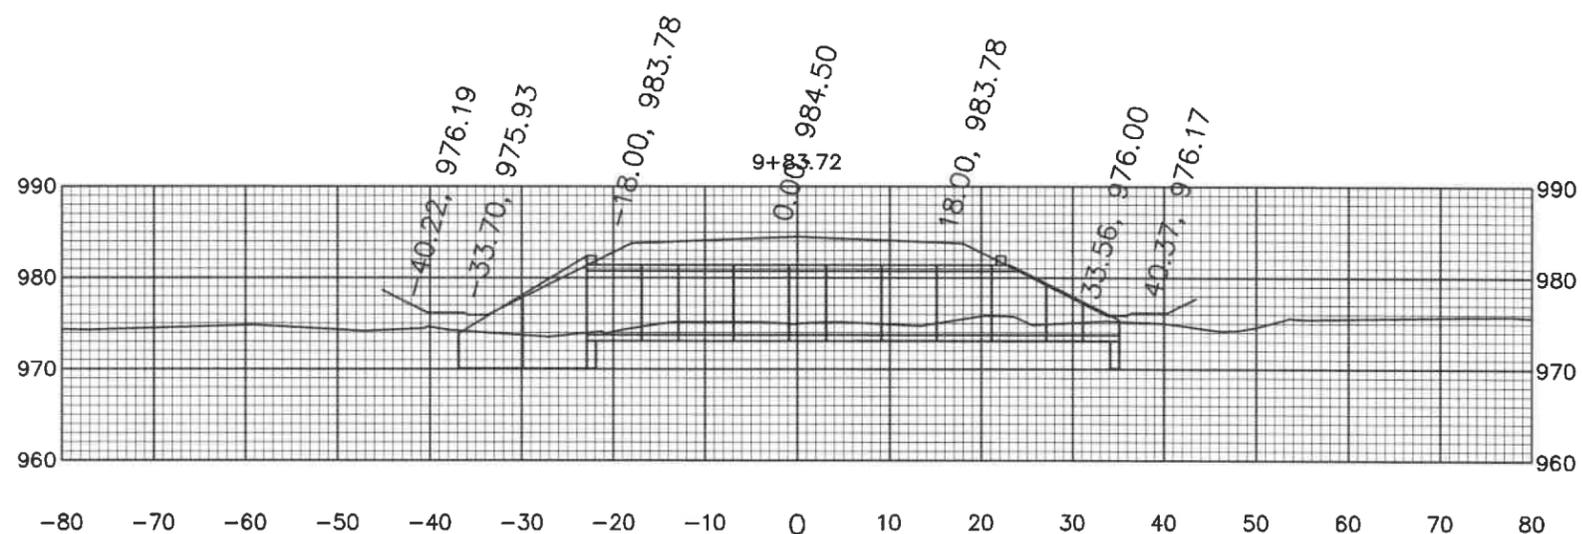


Sta. 9+83.72	
Cut Area	0.00
Fill Area	0.00
Cut Vol	0.00
Fill Vol	0.00

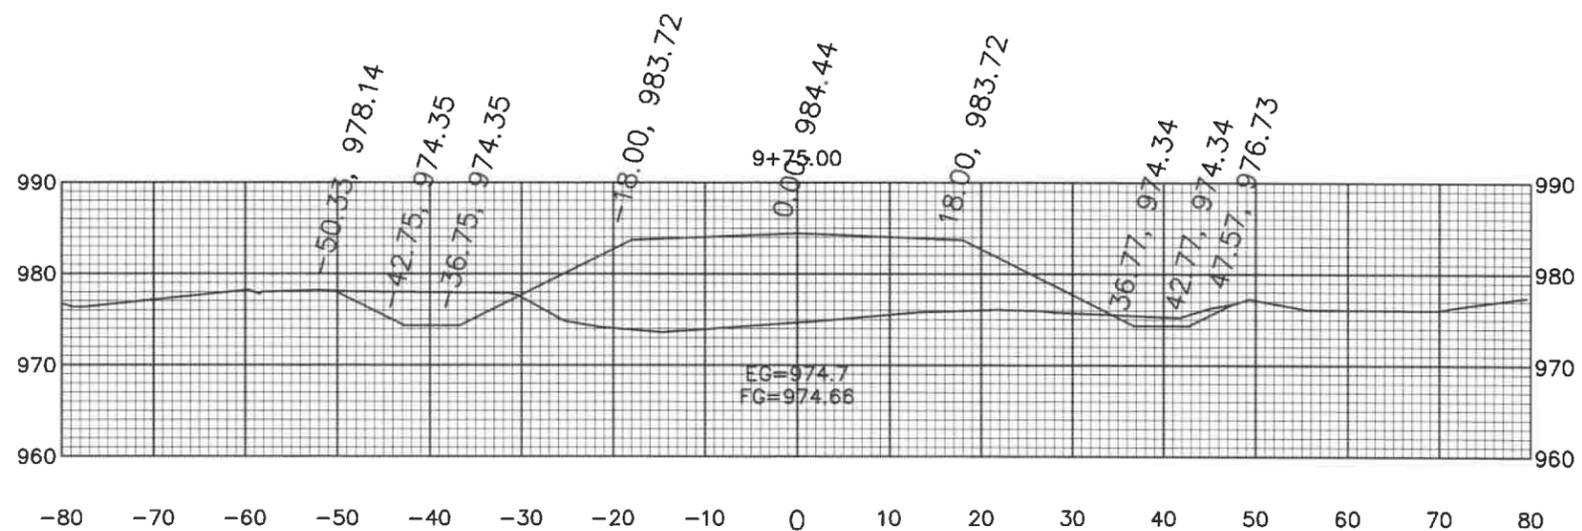


Sta. 9+75.00	
Cut Area	0.00
Fill Area	0.00
Cut Vol	0.00
Fill Vol	0.00

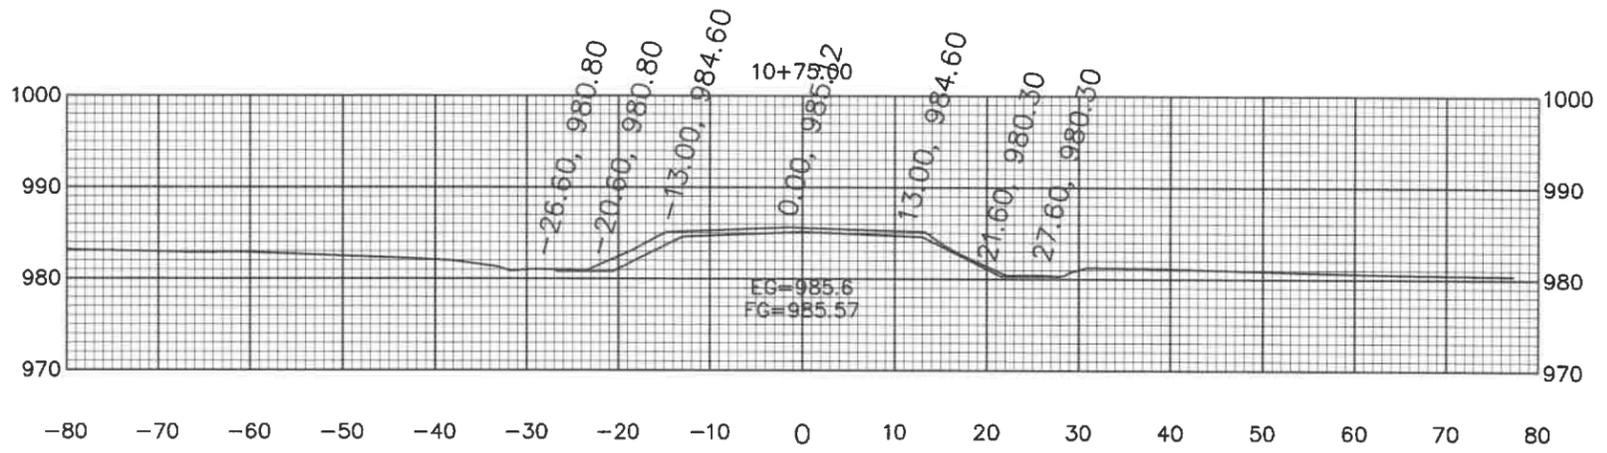

Sta. 10+75.00	
Cut Area	29.07
Fill Area	0.00
Cut Vol	27.85
Fill Vol	0.00

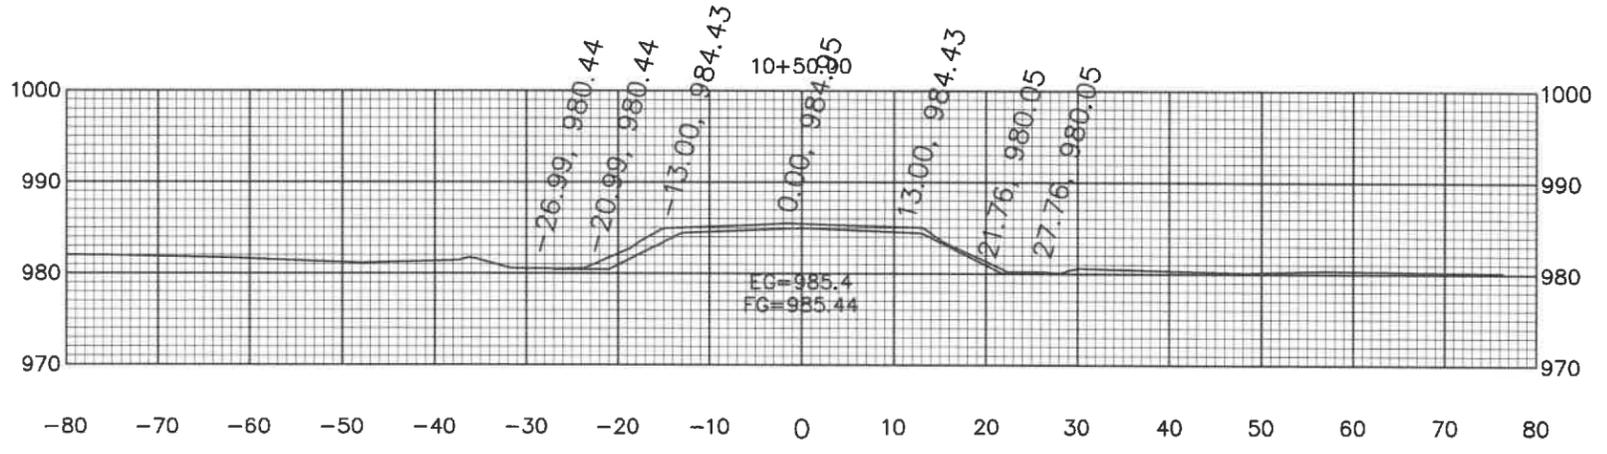

Sta. 10+50.00	
Cut Area	31.09
Fill Area	0.00
Cut Vol	29.10
Fill Vol	0.00

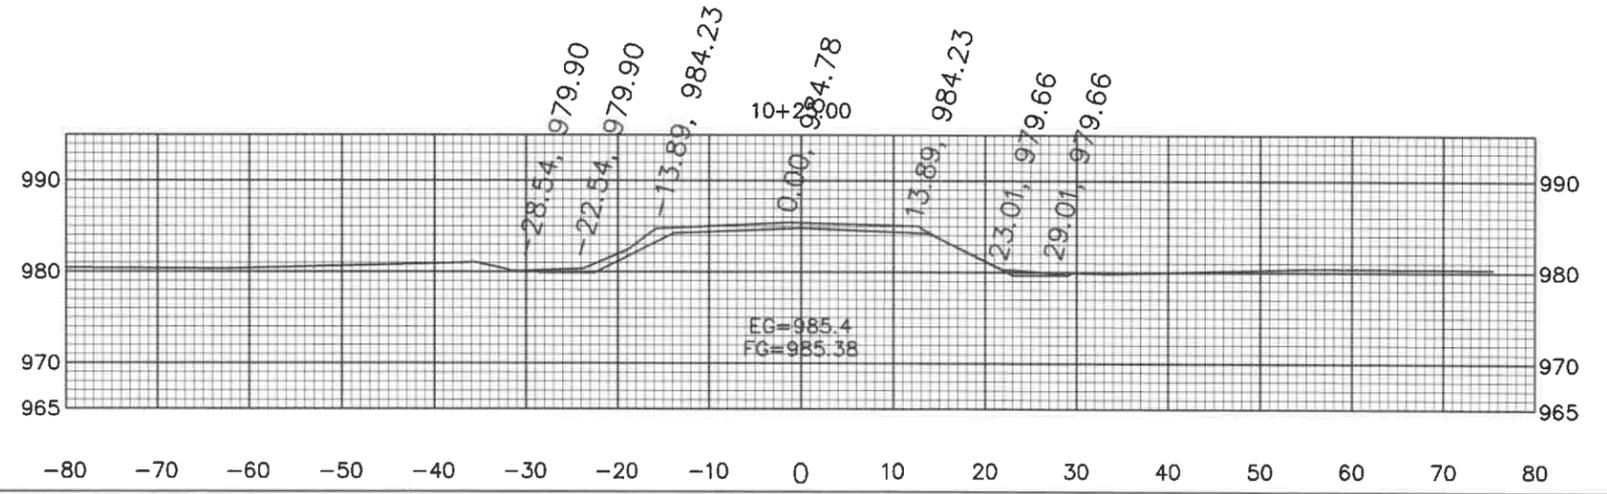

Sta. 10+25.00	
Cut Area	31.76
Fill Area	0.00
Cut Vol	29.98
Fill Vol	13.80